



WOOD THAT WORKS

WANDERING ASTERISK

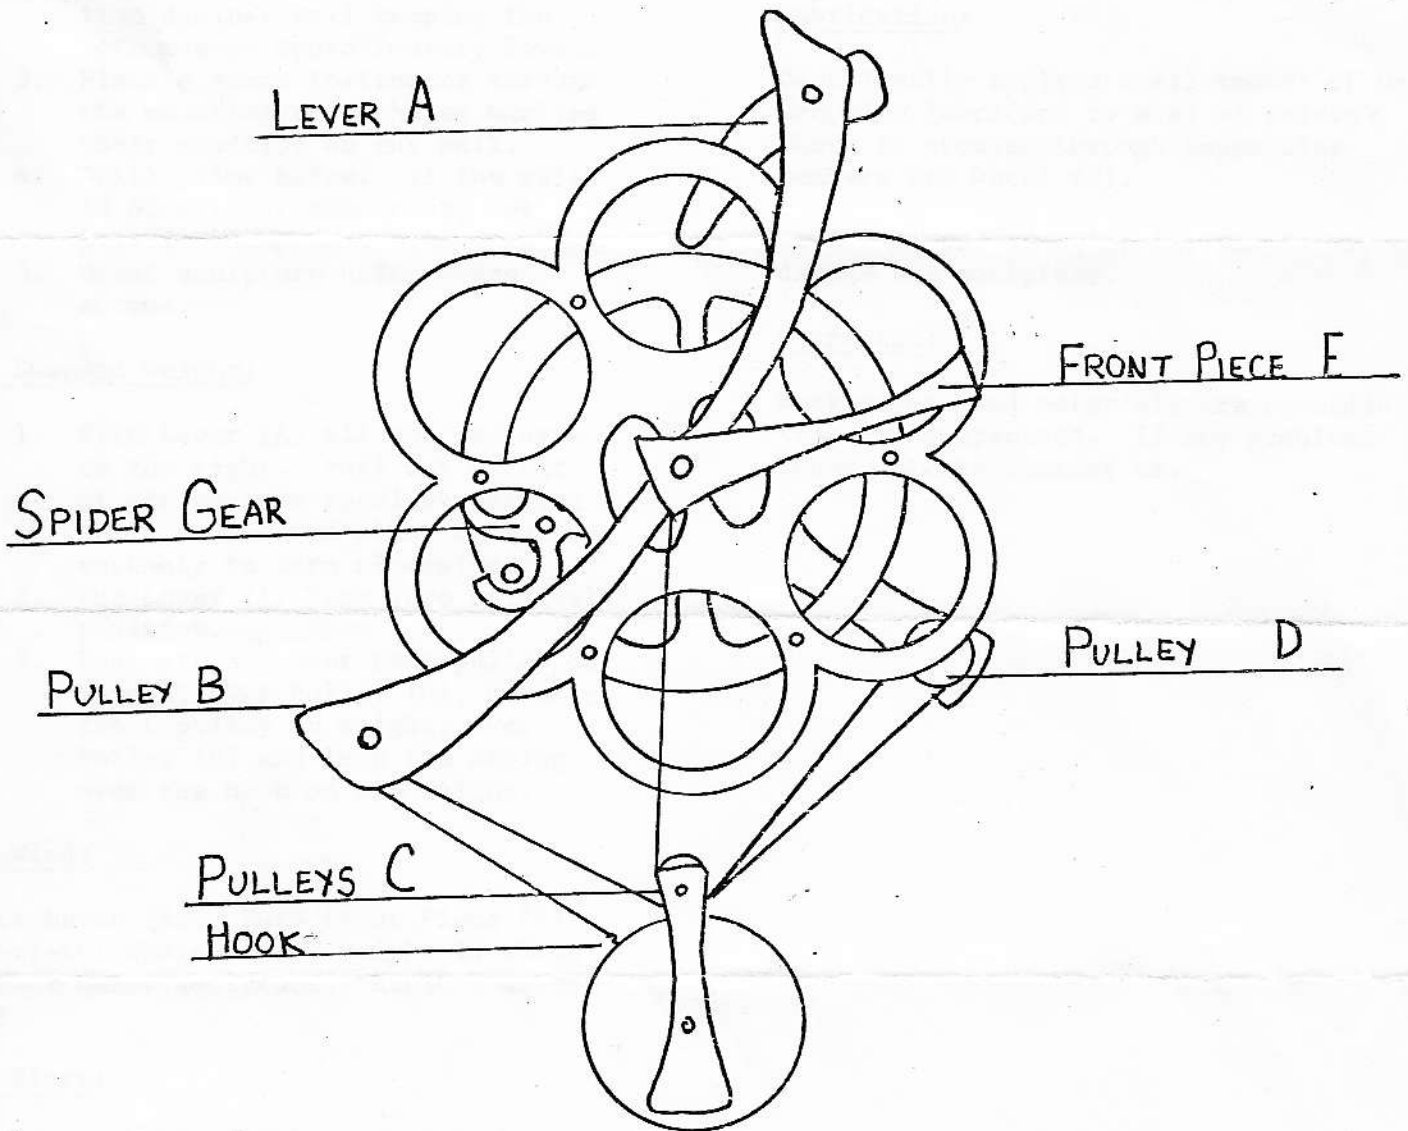

DAVE & MARJI ROY

WANDERING ASTERISK

Directions:

To Mount on Wall:

1. Remove sculpture from backboard by unscrewing screws.
2. Hold backboard in desired location against wall keeping the bottom edge approximately level.
3. Place a sharp instrument through the mounting screw holes marking their position on the wall.
4. Drill pilot holes. If the wall is plaster or sheetrock, use plastic anchors.
5. Mount sculpture using brass screws.

To Suspend Weight:

1. Flip Lever (A) all the way over to the right. Pull out 6 feet of string from spool by pulling on loose end and allowing entire assembly to turn clockwise.
2. Put Lever (A) back into original position.
3. Pass string under rear pulley on weight, over Pulley (D), under front pulley on weight, over Pulley (B) and loop the string over the hook on the weight.

To Wind:

Lift Lever (A). Turn front Piece (E) counterclockwise until weight is about 1 foot below sculpture. Replace Lever (A).

To Start:

Gently push Wheel (F) counterclockwise and release. NOTE: Occasionally the "spider gear" will loop around two pegs. Unhook it from one of the pegs before starting.

To Stop:

Stop Wheel (F) and gently bring it to rest on spider gear.

Lubrication:

Occasionally apply a small amount of Dry Graphite lubricant to axel at points where it crosses through supporting members and Wheel (F).

CAUTION: Use of other lubricants may damage the sculpture.